

# HMM | Hammer Mill

Efficient milling




- High crushing ratio
- High throughput performance possible
- Adjustable end product size
- Rotor rotation direction reversible
- Low maintenance costs

- Feed particle sizes up to 300mm
- Fine grinding possible down to <0.063mm

# HMM | Hammer Mill

## Sizes and Applications

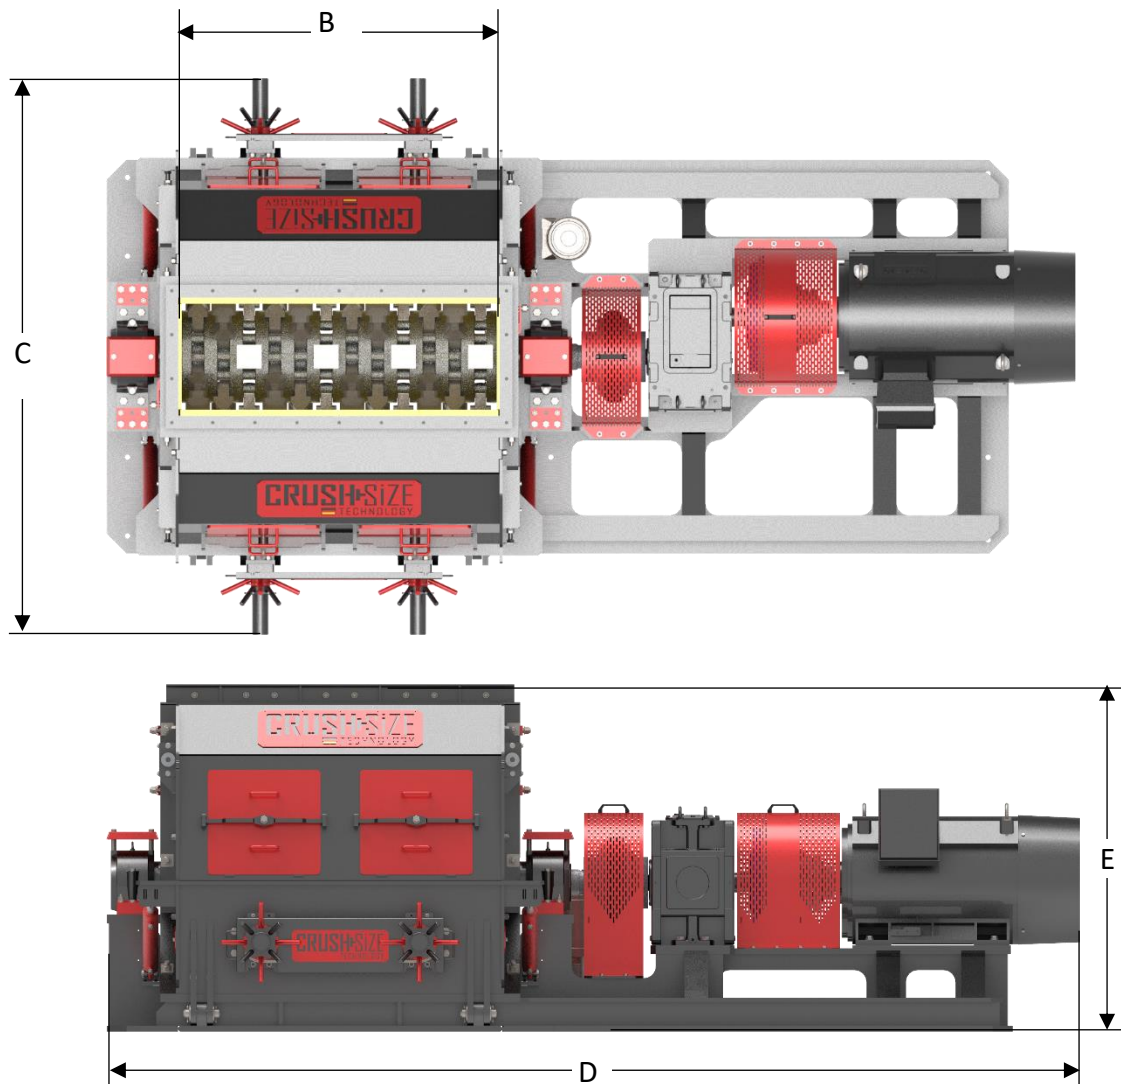

B: roller length | C: Machine width | D: Machine length | E: Machine height

| Size        | Weight<br>t | Throughput <sup>1</sup><br>t/h | F100<br>mm | P90<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm |
|-------------|-------------|--------------------------------|------------|-----------|---------|---------|---------|---------|
| HMM800-6    | 7           | 30                             | 63         | 0-3*      | 600     | 2500    | 3000    | 1500    |
| HMM 800-10  | 9           | 50                             | 63         | 0-3*      | 1000    | 2500    | 3400    | 1500    |
| HMM1000-8   | 9           | 65                             | 80         | 0-3*      | 800     | 2800    | 3500    | 1800    |
| HMM 1000-12 | 11          | 100                            | 80         | 0-3*      | 1200    | 2800    | 4100    | 1800    |
| HMM 1200-12 | 13          | 225                            | 200        | 0-3*      | 1200    | 3050    | 4200    | 2000    |
| HMM 1200-16 | 16          | 300                            | 200        | 0-3*      | 1600    | 3050    | 4600    | 2000    |
| HMM1400-14  | 17          | 270                            | 300        | 0-3*      | 1400    | 3250    | 4500    | 2200    |
| HMM 1400-18 | 19          | 350                            | 300        | 0-3*      | 1800    | 3250    | 5000    | 2200    |
| HMM 1600-18 | 19          | 530                            | 300        | 0-3*      | 1800    | 3500    | 5100    | 2400    |
| HMM 1600-34 | 26          | 1000                           | 300        | 0-3*      | 3400    | 3500    | 7000    | 2400    |

<sup>1</sup>Throughput calculation based on a material density of 1.3 kg/l.